


Inlet Supplies for Thermo TRACE 1300/1310 and 1600/1610 GCs

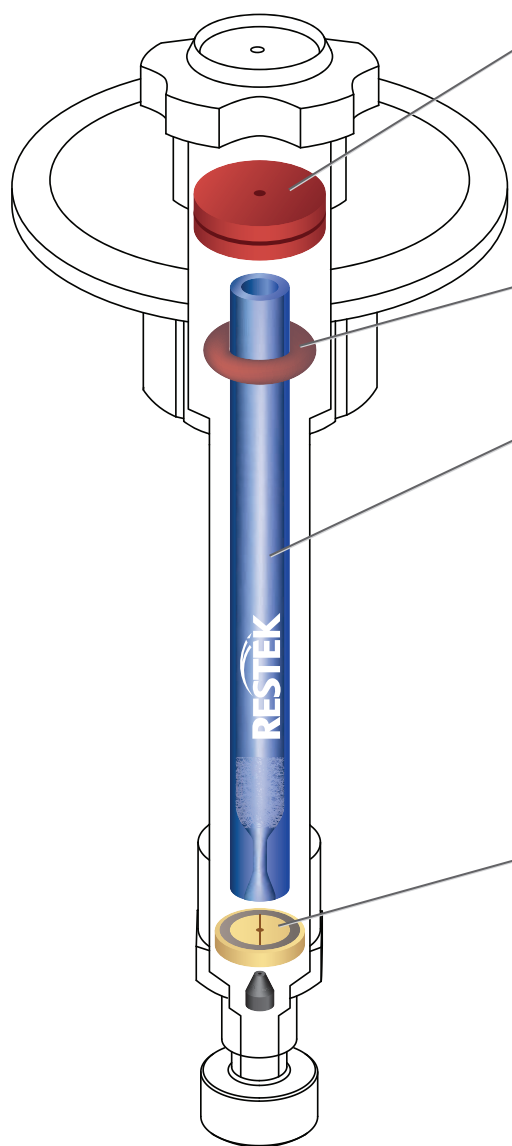

Septa (11 mm)

Septum Diameter	50-pk. cat.#	100-pk. cat.#
Thermolite Plus Septa (usable to 350 °C inlet temp.)		
11 mm (7/16") with CenterGuide	23864	23865
Premium Non-Stick BTO Septa (usable to 400 °C inlet temp.)		
11 mm (7/16") with CenterGuide, predrilled	27090	27091

Viton O-Rings

Description	Max Temp	Similar to TS Part #	10-pk. cat.#	50-pk. cat.#
Viton O-Rings	300 °C	290-013-20	22241	22242

Topaz Inlet Liner

ID x OD x Length	qty.	cat.#
Single Taper, Premium Deactivation, Borosilicate Glass with Quartz Wool 4.0 mm x 6.5 mm x 78.5 mm	5-pk.	23447
ID x OD x Length	qty.	cat.#
Single Taper, Premium Deactivation, Borosilicate Glass 4.0 mm x 6.5 mm x 78.5 mm	5-pk.	23446
ID x OD x Length	qty.	cat.#
Straight, Premium Deactivation, Borosilicate Glass with Quartz Wool 4.0 mm x 6.3 mm x 78.5 mm	5-pk.	23444
ID x OD x Length	qty.	cat.#
Precision, Premium Deactivation, Borosilicate Glass with Quartz Wool 4.0 mm x 6.3 mm x 78.5 mm	5-pk.	23267



Dual Vespel Ring Inlet Seals

0.8 mm ID Dual Vespel Ring Inlet Seal	2-pk. cat.#	10-pk. cat.#
Gold-Plated	22243	22244

Replacement Inlet Seals

Single-Column Installation 0.8 mm ID (Opening)	2-pk. cat.#	10-pk. cat.#
Gold-Plated	22231	22232

Visit www.restek.com for
a complete product listing.

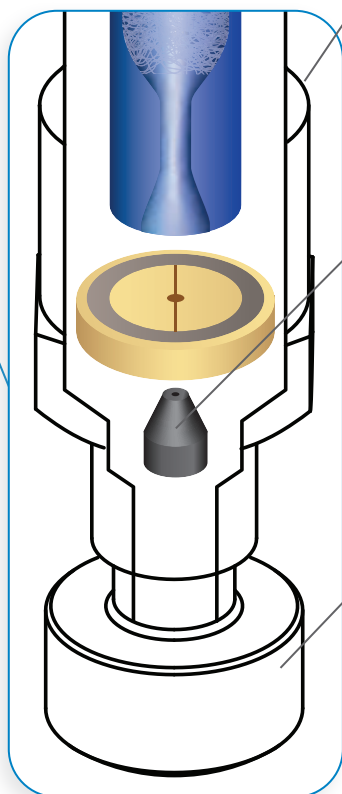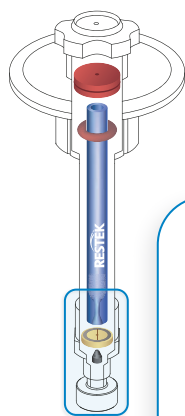

Reducing Nut

Description	qty.	cat.#
Direct Replacement Reducing Nut for Agilent 5890/6850/6890/7890/8890 GCs	ea.	22078

Compact Ferrules

Ferrule ID	Fits Column ID	qty.	Graphite
0.4 mm	0.025/0.05/0.075/0.10/0.15/0.18/0.20/0.25 mm (fused silica); 0.18 mm (MXT)	10-pk.	20250
0.5 mm	0.32 mm (fused silica); 0.25/0.32 mm (MXT)	10-pk.	21007
0.8 mm	0.45/0.53 mm (fused silica); 0.53 mm (MXT)	10-pk.	20252

Standard 1/16" Ferrules

Ferrule ID	Fits Column ID	qty.	Graphite
0.4 mm	0.025/0.05/0.075/0.10/0.15/0.18/0.20/0.25 mm (fused silica); 0.18 mm (MXT)	10-pk.	20200
0.5 mm	0.32 mm (fused silica); 0.25/0.32 mm (MXT)	10-pk.	20201
0.8 mm	0.45/0.53 mm (fused silica); 0.53 mm (MXT)	10-pk.	20202

Column Nuts

Description	qty.	cat.#
Hot Swap Capillary Column Nut for Agilent Standard 1/16" Ferrules	ea.	22347
Hot Swap Capillary Column Nut for Agilent Compact Ferrules	ea.	22348
Capillary Column Nut, Stainless Steel, for Use w/Agilent Compact Ferrules	2-pk.	21884
Capillary Column Nut, Brass, for Use w/Agilent Compact Ferrules	2-pk.	21878
Capillary Column Nut, Stainless Steel, for Use w/Standard 1/16" type Ferrules	2-pk.	20883
Capillary Column Nut, Brass, for Use w/Standard 1/16" type Ferrules	2-pk.	21879

Installation Gauge

Description	qty.	cat.#
Finger-Tight Column Installation Gauge with Agilent-Style GC Inlet Fitting for Agilent GCs (except Intuvo); PerkinElmer 590/690 and GC2400 GCs; Thermo TRACE 1300/1310 and 1600/1610 GCs	ea.	27228

Visit www.restek.com for a complete product listing.

RESTEK
Pure Chromatography

Questions? Contact us or your local Restek representative (www.restek.com/contact-us).

Restek patents and trademarks are the property of Restek Corporation. (See www.restek.com/Patents-Trademarks for full list.) Other trademarks in Restek literature or on its website are the property of their respective owners. Restek registered trademarks are registered in the U.S. and may also be registered in other countries. To unsubscribe from future Restek communications or to update your preferences, visit www.restek.com/subscribe. To update your status with an authorized Restek distributor or instrument channel partner, please contact them directly.

© 2024 Restek Corporation. All rights reserved. Printed in the U.S.A.

www.restek.com



Lit. Cat.# GNSS2131E-UNV